

## SITNC712A

### 1. Description

The SITNC712A protects sensitive semiconductor components from damage or upset due to electrostatic discharge (ESD) and other voltage induced transient events. They feature large cross-sectional area junctions for conducting high transient currents, offer desirable electrical characteristics for board level protection, such as fast response time, low operating voltage. It gives designer the flexibility to protect one bi-directional line in applications where arrays are not practical.

### 2. Features

#### IEC 61000-4-2 Level 4 ESD Protection

- ±8kV Contact Discharge
- ±15kV Air Discharge
- IEC 61000-4-4 EFT Protection
  - 40A (5/50ns)
- 350W Peak pulse Power (8/20us)

- RoHS compliance
- Bidirectional configuration
- IO Capacitance: 55pF (Typical)
- Low clamping voltage
- SOT-23 package

- 3. Applications
  - RS-485
  - Security systems

- Automatic teller machines
- HFC systems

#### 4. Ordering Information

Part Number	Package	Marking	Material	Packing	Quantity per reel	Flammability Rating	Reel Size
SITNC712A	SOT-23	712	Halogen free	Tape & Reel	3,000 PCS	UL 94V-0	7 inches

Table-1 Ordering information



# 5. Pin Configuration and Functions

Pin	Name	Description	Outline	Circuit Diagram
1	Ю	Connect to IO	3	<u>j3</u>
2	Ю	Connect to IO	712	
3	GND	Connect to GND		

#### Table-2 Pin configuration

# 6. Specification

# 6.1. Absolute Maximum rating

Over operating free-air temperature range (unless otherwise noted)

Parameters	Symbol	Min.	Max.	Unit
Peak pulse power (tp=8/20us)@25°C	$P_{pk}$	-	350	W
Peak pulse current (tp=8/20us)@25°C	I <sub>PP</sub>		17	А
ESD (IEC61000-4-2 air discharge) @25°C	$V_{\text{ESD}}$	-	±15	kV
ESD (IEC61000-4-2 contact discharge) @25°C	$V_{\text{ESD}}$	-	±8	kV
Junction temperature	TJ	-	150	°C
Operating temperature	T <sub>OP</sub>	-40	125	°C
Storage temperature	T <sub>STG</sub>	-55	150	°C
Lead temperature	ΤL	-	260	°C

Table-3 Absolute Maximum rating



## 6.2. Electrical Characteristics


At TA = 25°C	unless otherwise noted
--------------	------------------------

Parameters	Symbol	conditions	Min.	Тур.	Max.	Unit	
Reverse stand-off voltage	Vrwm	Pin1 or Pin2 to Pin3			12	V	
		Pin3 to Pin1 or Pin2			7		
Reverse Breakdown Voltage	V <sub>BR</sub>	Pin1 or Pin2 to Pin3; $I_R$ = 1mA	13.3			V	
		Pin3 to Pin 1or Pin2; I <sub>R</sub> = 1mA	7.5				
Reverse	I <sub>R</sub>	Pin1 or Pin2 to Pin3; V <sub>RWM</sub> =12V			1	uA	
Leakage Current		Pin3 to Pin1or Pin2; V <sub>RWM</sub> =7V			1		
Peak Pulse Current	I <sub>PP</sub>	Pin1 or Pin2 to Pin3		17		٨	
		Pin3 to Pin1 or Pin2		17		A	
Clamping Voltage	V <sub>CL</sub>	Pin1 or Pin2 to Pin3; I <sub>PP</sub> =17A		26			
		Pin3 to Pin1 or Pin2; IPP=17A		19		V	
Junction capacitance	Co	V <sub>R</sub> =0V; f = 1MHz		55		pF	


Table-4 Electrical Characteristics



# 7. Typical Characteristic

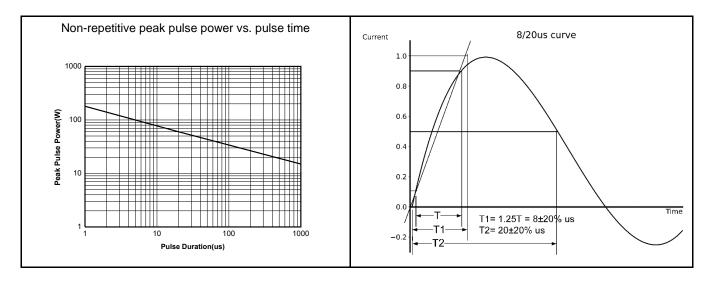


# 8. Typical Application

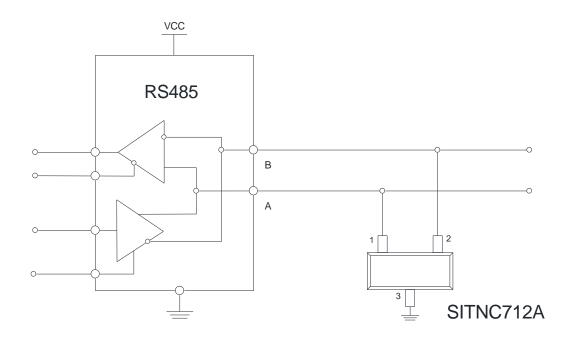


Typical RS485 Interface Application





## 9. Dimension





SOT-23






Dimensions in Millimeters						
Symbol	Min.	Max.	Symbol	Min.	Max.	
А	0.9	1.15	e1	1.80	2.00	
A1	0.00	0.10	L	0.55REF		
b	0.30	0.50	L1	0.30	0.50	
С	0.08	0.15	θ	0°	8°	
D	2.80	3.00				
E	1.20	1.40				
E1	2.25	2.55				
е	0.95	ТҮР				

Table-5 Product dimensions

Rev-1.1



# 10. Recommended Land Pattern

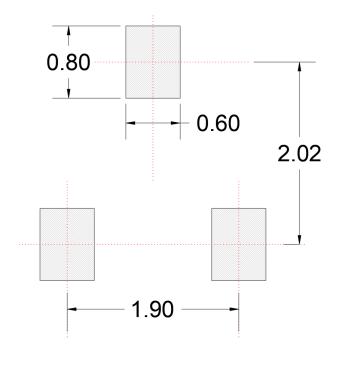

Note:

- 1. Controlling dimension: in millimeters
- 2. General tolerance:  $\pm 0.05$ mm
- 3. The pad layout is for reference only



#### DISCLAIMER

SIT PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with SIT products. You are solely responsible for

(1) selecting the appropriate SIT products for your application;

(2) designing, validating and testing your application;

(3) ensuring your application meets applicable standards, and any other safety, security, or other requirements.

These resources are subject to change without notice. SIT grants you permission to use these resources only for development of an application that uses the SIT products described in the resource. Other reproduction and display of these resources are prohibited. No license is granted to any other SIT intellectual property right or to any third party intellectual property right. SIT disclaims responsibility for, and you will fully indemnify SIT and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources. SIT's products are provided subject to SIT's Terms of Sale or other applicable terms available either on www.SIT.com or provided in conjunction with such SIT products. SIT's provision of these resources does not expand or otherwise alter SIT's applicable warranties or warranty disclaimers for SIT products.